




## FIRE IN MOTION





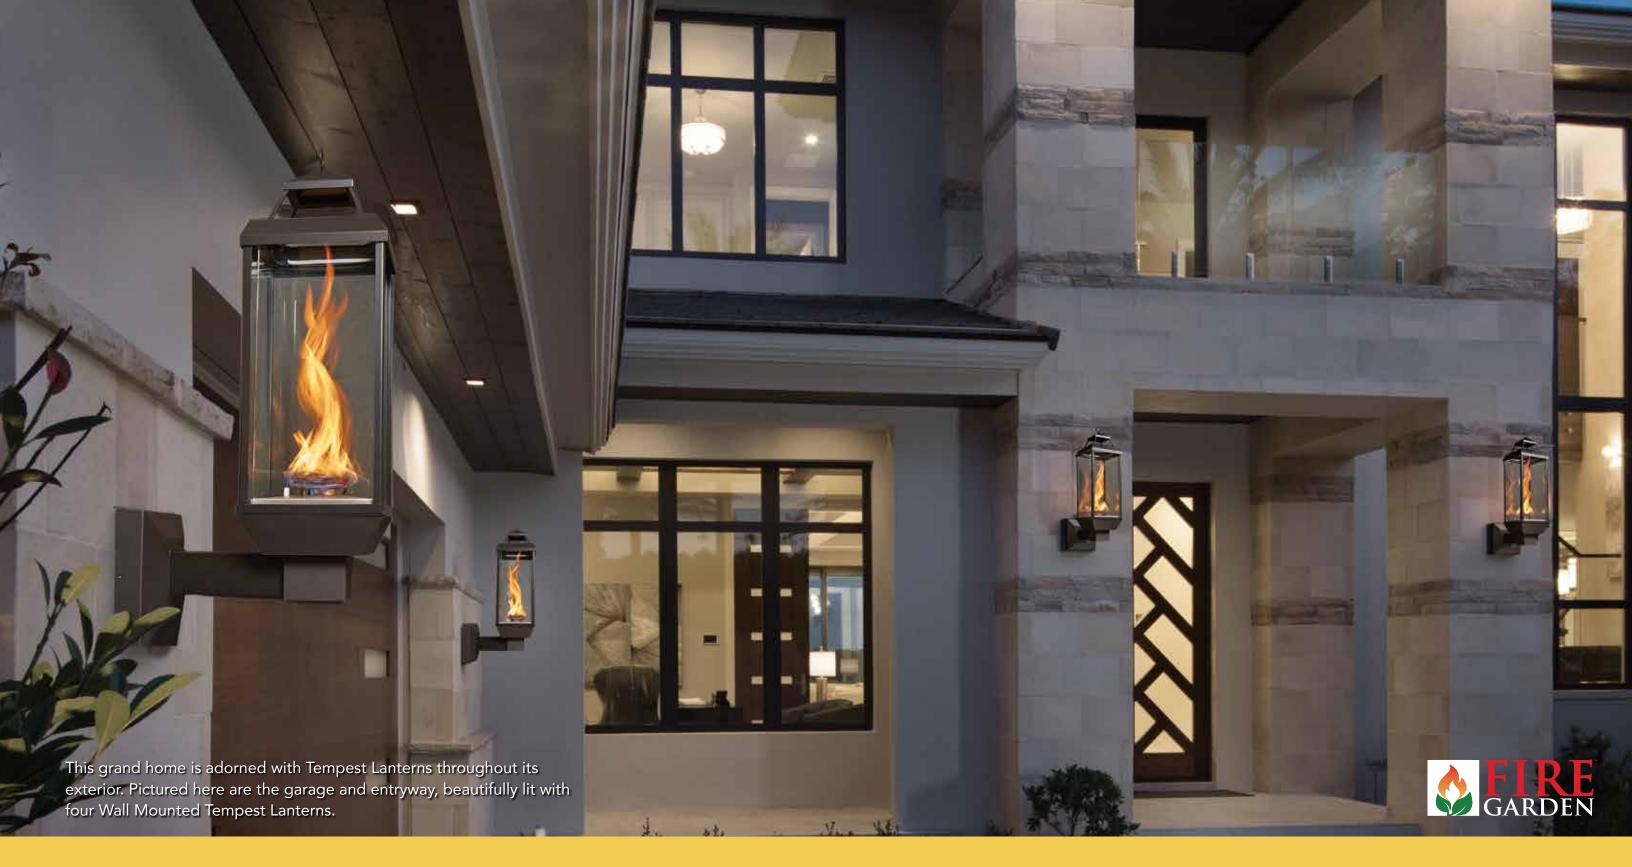

Both the Tempest Torch™ and Tempest Lantern™ feature a wide array of applications and display possibilities for outdoor living and entertainment spaces, including decks, patios, pools, gardens, walkways, entryways, restaurants, storefronts and more!

The signature spiraling flame of the Tempest Torch<sup>™</sup> and Tempest Lantern<sup>™</sup> reaches a height of 17 inches and provides up to 20,000 BTUs. The four-sided, 18-inch tall open-air tempered glass housing is designed to prevent the flame from going out during high winds or rainfall, but includes an automatic gas safety shutoff valve, should the flame ever go out.

4 | Fire In Motion tempesttorch.com | 5




## PICK THE IGNITION SYSTEM THAT BEST MEETS YOUR NEEDS

### **ELECTRONIC IGNITION 24V MODEL**

The Electronic Ignition model can be used with a light switch, remote control, programmable timer or wired into a SmartHome system. Available in NG and LP.

### PIEZO IGNITER MODEL

The manual light model works with a built-in Piezo Igniter and easy access control panel. Available in NG and LP.

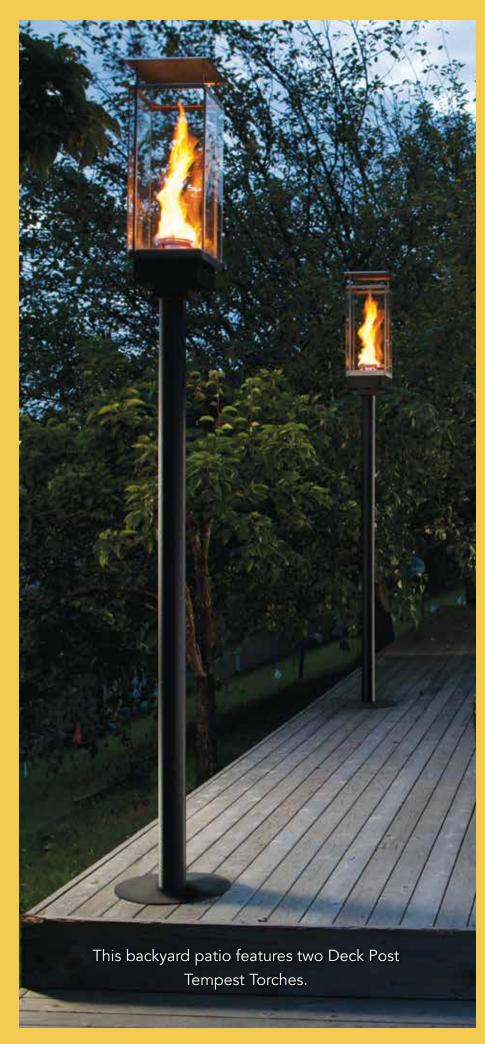

### FEATURES YOU'RE GOING TO LOVE

- The Tempest Torch™ and Tempest Lantern<sup>™</sup> can be installed in four different ways:
- Ground Post
- Deck Post
- Pillar Mount
- Wall Mount
- Automatic gas shutoff for added safety if the flame ever goes out.
- Removable rain cap included.
- Tempered glass panels are easy to remove for cleaning and service.
- The Tempest Torch™ features a durable stainless steel frame and burner.
- The Tempest Lantern™ features a durable, high temperature black powder coated frame & cap.
- Available in your choice of natural gas or propane.
- COMING SOON Larger 50K Version of the Tempest Lantern™




50K Version 20K Version






# **Tempest Torch™**

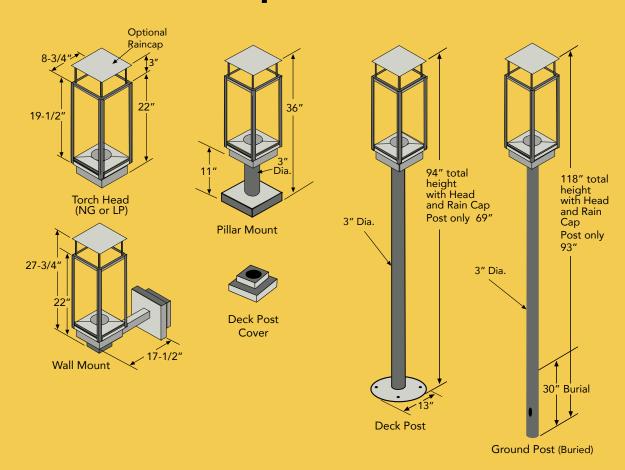

# **Tempest Lantern**<sup>™</sup>

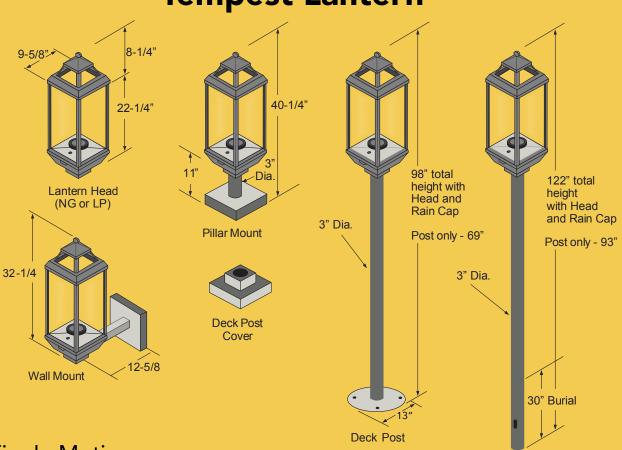



### **Minimum Clearances To Combustibles**

Floor: 2.5" combustible floor to bottom (base) of torch

Walls: 8" measured from glass surface

Ceiling: 26" measured from the torch top (glass frame) with or without the raincap. (Refer to the Owner's Manual for

further details)

<b>Gas Rating</b>	NG	LP
Btus/Hr High	20,000	20,000
Btus/Hr Low	14,000	17,000

### For Your Safety:

FOR OUTDOOR INSTALLATION ONLY!

Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.

### **WARNING:**

Improper installation, adjustment, alteration, service or maintenance can cause injury or property damage. Refer to the owner's information manual provided with this appliance. For assistance or additional information consult a qualified installer, service agency or the gas supplier.

## **Electronic Ignition 24V Model**

Install up to six torches on a single transformer and up to five transformers on one 120 volt 15 amp circuit. This can give you up to 24 torches on a single circuit!

## **Testing**

Ground Post (Buried)

Applicable portions of ANSI Z21.42a-2004 "Illuminating Appliances", CAN 1-2.15, CSA 4.96 U.S. (3rd Ed) "Outdoor Gas Fireplace", and AGA 8-96, "Requirement for Gas-Fired Decorative Illuminating Appliances for Outdoor Installation."





