

# OFP42 ZERO CLEARANCE OUTDOOR GAS FIREPLACE








2340 Logan Avenue Winnipeg, Manitoba, Canada R2R 2V3 Phone: (204) 632-1962 Fax: (204) 632-1960 www.kingsmanfireplaces.com

Model	OFP42N	OFP42LP
	OFP42NS	OFP42LPS
Fuel	Natural	Propane
Input Max.	55,000 BTU	55,000 BTU
Input Min.	38,000 BTU	44,000 BTU

- Satin Coat with a Black Paint Finish and stainless steel pull screen. A great alternative when covering the front face with brick or other non combustible materials. (Satin coat steel is pretreated with a zinc coating for corrosion resistance and paint adhesion.)
- Stainless steel firebox, front and pull screens. Stainless steel provides a clean, contemporary and weather-resistant finish so that you canenjoy your fireplace for years to come.

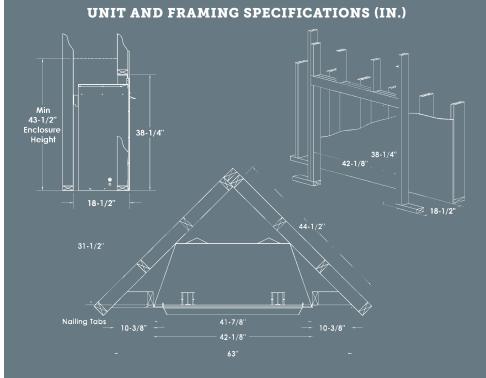



Model OFP42N Outdoor Fireplace – Natural Gas, LOGF37 Split Oak Log Set, OFP42RLT Traditional Brick Liner.

## Two fireplace choices and no venting required.



#### **STANDARD FEATURES\***

- Hi/lo Millivolt valve with variable adjustment of flame and BTU
- A flame sensor that constantly monitors the pilot flame and provides 100% gas shut off if pilot is not sensed
- Stainless steel pull screen
- Lava Rock

## **OPTIONAL FEATURES**

#### Surround Stainless Steel

Remote Control



Log Set LOGF37 Log Set – Five Pieces

Weather Cover Stainless Steel or Black

Spark Assist Battery Operated Pilot Burner Ignitor

**Refractory Liner** Traditional or Herringbone



#### SCREENED PORCH INSTALLATION GUIDELINES

- Porch Area 96 sq. ft
- Ceiling Height 92"
- A minimum of two walls can be screened but must be open to outside ventilation

Minimum Screen Height - 78"

Screen Area - 64 sq. ft

Refer to installation manual for additional details of framing specifications and clearances



CRAFTED ENTIRELY IN CANADA, EACH KINGSMAN FIREPLACE IS BUILT TO THE HIGHEST STANDARDS AND MADE TO LAST.

. CSA 4.96 US 2nd Edition, CGA CR97-003, CGA 2.17-M91

Printed